


CAT6 ETHERNET RJ45 PATCH CABLE, STRANDED, SNAGLESS BOOTED, BLACK

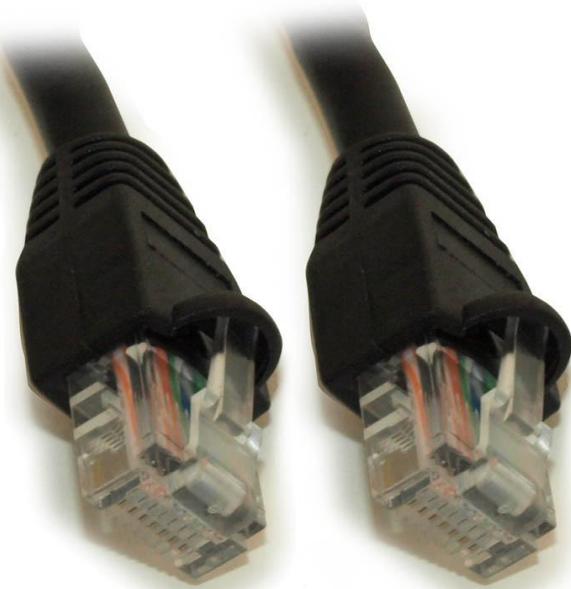

Lengths Available:	6in, 1ft, 2ft, 3ft, 4ft, 5ft, 6ft, 7ft, 10ft, 14ft, 20ft, 25ft, 30ft, 35ft, 40ft, 50ft, 60ft, 75ft, 150ft, 200ft,
Colors Available:	Black, Blue, Gray, Green, Orange, Purple, Red, White, Yellow,
Part Numbers this model:	FE-C6-6IN-BLK, BE-100701BK , FE-C6-02-BLK, FE-C6-03-BLK, FE-C6-04-BLK, FE-C6-05-BLK, FE-C6-06-BLK, FE-C6-07-BLK, FE-C6-10-BLK, BC-C6MB-14-BLK, FE-C6-20-BLK, FE-C6-25-BLK, FE-C6-30-BLK, FE-C6-35-BLK, FE-C6-40-BLK, FE-C6-50-BLK, FE-C6-60-BLK, BE-100710BK, FE-C6-150-BLK, BE-100715BK,
Sales Category:	CAT 6 Networking Cables
Connector A:	RJ45 Ethernet Male
Connector B:	RJ45 Ethernet Male
Export Tariff Code (HST):	8544422000
Feature / Style:	Molded Plugs
# Positions:	8p8c (RJ45, Ethernet)
Convert From/To:	
Wire Gauge (AWG):	26 AWG
Specification:	
Number Ports:	N/A
Transfer Rate:	
Images Length/Size Shown:	1 FT
Shielding:	Unshielded
Type:	Plug to Plug

Connects any CAT6 application such as computer to hub, patch panel or wall jack. This 550MHz CAT6 PVC stranded patch cord meets TIA/EIA 568A specifications, and support all CAT6 and other high speed applications. It has stranded wires for added cable flexibility.

Technical Specifications:

- 26AWG Copper twisted pairs
- Suitable for any 10Mbit, 100Mbit, 1GB network standards up to 330ft segment runs
- 550Mhz Category 6, exceed IEEE standards suitable for 1Gbit networks.
- Unshielded Twisted pairs (UTP) suitable for most business and home network installations
- CM NEC Rated for In-wall installation (Home or business)
- Meets EIA/TIA TSB-40A for Stranded 568B standards
- 50u Gold Plated contacted
- Molded Strain Relief boot connectors
- RoHS-2 Compliant
- See TECH DOC for drawing and additional technical information
- NOT UL Listed, but meets UL standards