



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description

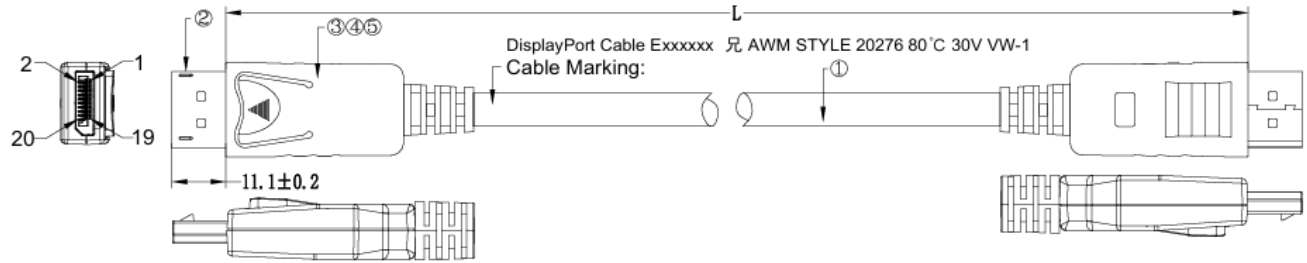


PIN Assignment(1.2V)

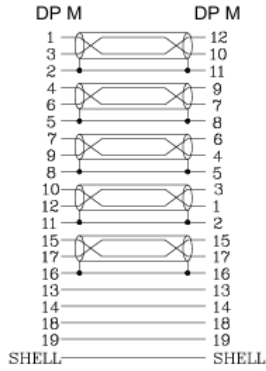


Electrical character:

- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:5 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 4K@60Hz TEST

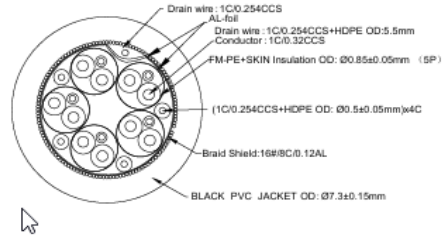

A-A
28AWG,1.2V

28AWG[(1C/0.32CCS*1P+D1C/0.254CCS+AL/MY)*5P+1C/0.254CCS*5C]
+AL+D1C/0.254CCS+B128/0.12AM+PVC OD: 7.3±0.15mm



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	Outermold	PVC,45P,Black	N/A	G
④	SHELL	Black ABS shell	2	Pcs
③	Innermold	PE,Low density	N/A	G
②	HDMI_Conn	HDMI A/M,PIN G/F,BLACK Insulation, SHELL:Gold plated	2	Pcs
①	CABLE	28AWG[(1C/0.32CCS*1P+D1C/0.254CCS+AL/MY)*5P+1C/0.254CCS*5C] +AL+D1C/0.254CCS+B128/0.12AM+PVC OD: 7.3±0.15mm	N/A	MM

DP-XXMM		
DRAWN BY	DATE: 2020-04-30	DESCRIPTION: DPM TO M Cable 28AWG, 3FT,6FT,10FT,15FT
CHECKED BY	SHEET 1 of 1	
APPROVED BY	SCALE None	REV.00 UNIT:mm