


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm Max
3. Insulation Resistance: 10M ohm Min
4. Hi-Pot: 100V DC/10ms

Pin Assignment

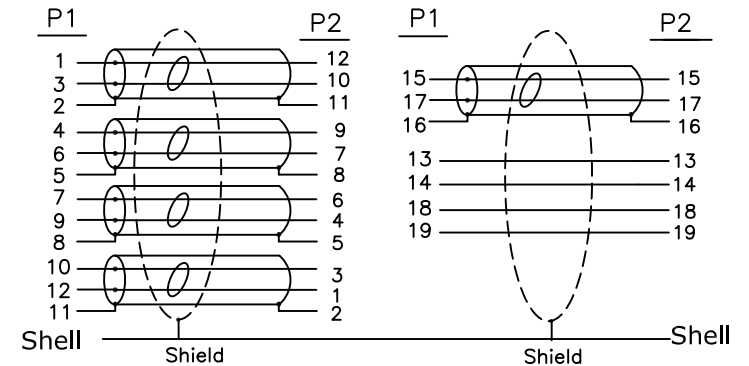

NO.	DESCRIPTION	Q'TY	UNIT	TOLERANCE			TITLE:	CUSTOMER :	DRAWING NO:	REV
				INCHES	M/M					
5	Inside Molding: LDPE	5	g	.X	.015	.30	Display Port 1.4 M TO M	CUSTOMER P/N:	DRAWING NO:	AO
4	Outside Molding: 45P PVC	12	g	.XX	.010	.10				
3	DisplayPort Port M ABS Shell Color: Black	2	pcs	.XXX	.005	.05				
2	DisplayPort Port M Insulation Black Shell Gold Plated	2	pcs	DRAWN BY	Hong			SCALE	NONE	1/1
1	DP1.4~[27AWG(7/0.14TC)+EAM]*5P+27AWG(7/0.14TC)*4C+AEB(16/10/0.12 85%AL)~OD:7.3MM~Color: Black Marking:DisplayPort Cable E342987 兎 AWM STYLE 20276 80°C 30V VW-1	3.07	M	CHECK BY				UNIT	MM	
				APPD BY				DATE	2020.07.09	