


### Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm Max
3. Insulation Resistance: 10M ohm Min
4. Hi-Pot: 100V DC/10ms

### Pin Assignment

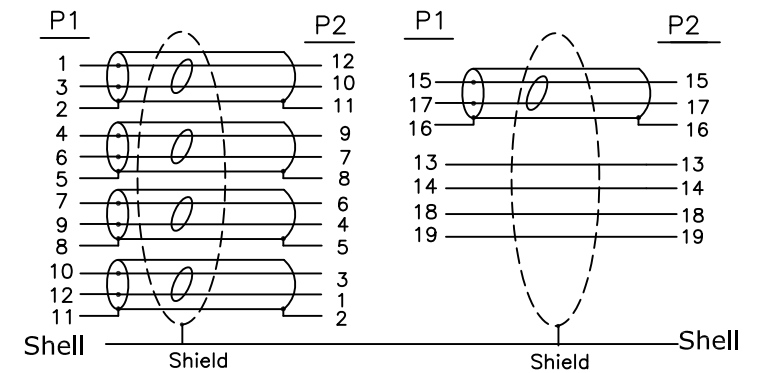

NO.	DESCRIPTION	Q'TY	UNIT	APPD BY	DATE	2020.07.09	DRAWING NO:	REV	
7	Inside Molding: LDPE	5	g		TOLERANCE		CUSTOMER : CUSTOMER P/N: SCALE NONE UNIT MM DATE 2020.07.09	DRAWING NO: REV AO 1/1	
6	Outside Molding: 45P PVC	12	g		.X	.015			.30
5	copper foil:25u W=8MM	0.09	M		.XX	.010			.10
4	DisplayPort Port M ABS Shell Color: Black	2	pcs		.XXX	.005			.05
3	DisplayPort Port M The tin	2	pcs	DRAWN BY	Hong				
2	DisplayPort Port M Insulation Black Shell Gold Plated	2	pcs	CHECK BY					
1	DP1.4~[32AWG(7/0.08TC)+EAM]*5P+32AWG(7/0.08TC)*5C+AEB(16/7/0.12 85%AL)~OD;4.8MM~Color: Black Marking:DisplayPort Cable E342987 兄 AWM STYLE 20276 80℃ 30V VW-1	0.94	M	APPD BY					