


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm Max
3. Insulation Resistance: 10M ohm Min
4. Hi-Pot: 100V DC/10ms

Pin Assignment

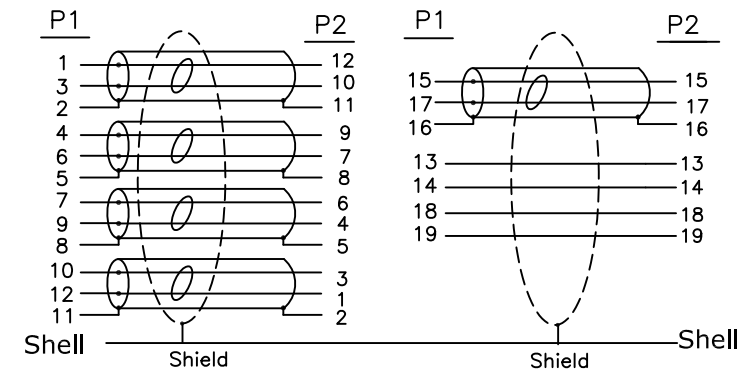

7	Inside Molding: LDPE	5	g	 TOLERANCE INCHES M/M	TITLE: Display Port 1.4 M TO M CUSTOMER : CUSTOMER P/N: SCALE NONE UNIT MM DATE 2020.07.09 DRAWING NO: REV A0 1/1				
6	Outside Molding: 45P PVC	12	g						.X .015 .30
5	copper foil:25u W=8MM	0.09	M						.XX .010 .10
4	DisplayPort Port M ABS Shell Color: Black	2	pcs						.XXX .005 .05
3	DisplayPort Port M The tin	2	pcs	DRAWN BY	Hong				
2	DisplayPort Port M Insulation Black Shell Gold Plated	2	pcs	CHECK BY					
1	DP1.4~[30AWG(7/0.10TC)+EAM]*5P+30AWG(7/0.10TC)*4C+AEB(16/10/0.12 85%AL)OD:6.0MM~Color: Black Marking:DisplayPort Cable E342987 兎 AWM STYLE 20276 80℃ 30V VW-1	1.85	M	APPD BY					
NO.	DESCRIPTION	Q'TY	UNIT						