


⚠ *NOTE: ALL relevant materials are complied with ROHS directive

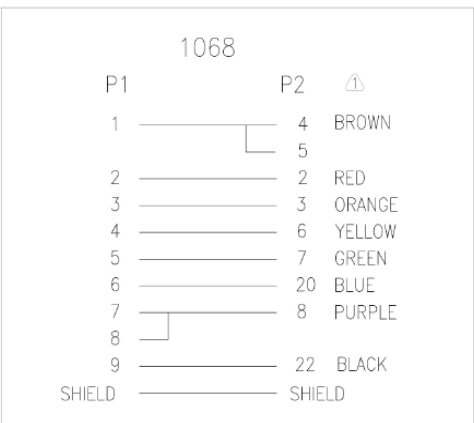

6	BLACK PVC TUBE $\phi 3.0 \times 30\text{mm}$	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*110mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
5	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	H7A001-0304K09	1	M304
	ALUMINUM FOIL 33*65mm	A6MA05-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BEIGE	H1BF01-0304B01		M304
4	NON-UL 8C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2808C-045	H5BL27-0304B01	L=20mm	M304
	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	H1RB01-0304B01 A6AA30-0095	4	M95
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AE09-0277U09	1	M277
1	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	A1AA01-0277U09	1	M277
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		NM925-XXFM	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm $\pm 40\text{mm}$
CHECKED	HU		
DRAWING	ZHU		
DATE	05/JULY/19	ITEM NO.	UNIT:mm

⚠ REV.2 2019.07.05 MODIFY MOLD SIZE

⚠ REV.1 2011.08.02 ADD RoHS & INSULATOR COLOR

CHECKED