


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

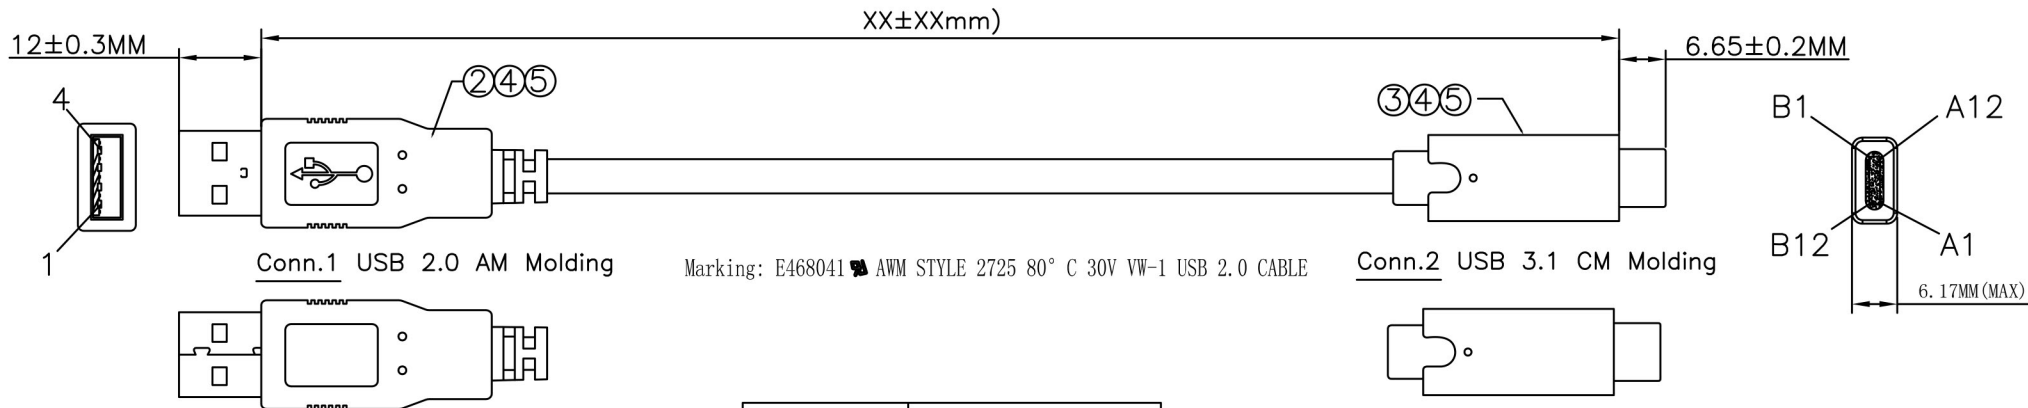


150190	1FT(305±10MM)
150191	3FT(915±15MM)
150192	6FT(1830±30MM)

Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

Pin Assignment

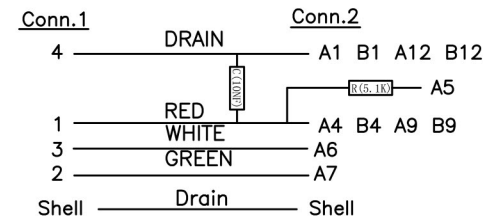

5	45P PVC BLACK	1	PCS
4	PE	1	PCS
3	USB3.1 (C) M Solder Type Shell Nickel, ecru Insulation	1	PCS
2	USB2.0 (A) M Solder Type Shell Nickel White Insulation	1	PCS
1	UL272528# (7/0. 127TC)*1P+24# (7/0. 2TC)*2C+AL+D (7/0. 127T)+B (16/4/0. 12AL) OD:4.2MM Black PVC	XX	m
NO	DESCRIPTION	Q'TY	UNIT

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

MY CABLE MART

DRAWN BY	DATE: 2017.5.28	DESCRIPTION: USB 2.0 AM TO Type C Male
CHECKED BY	SHEET 1 of 2	ITEM NO. 1501XX
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm