



Rev.	Rev. Date	Modified By	Brief Description

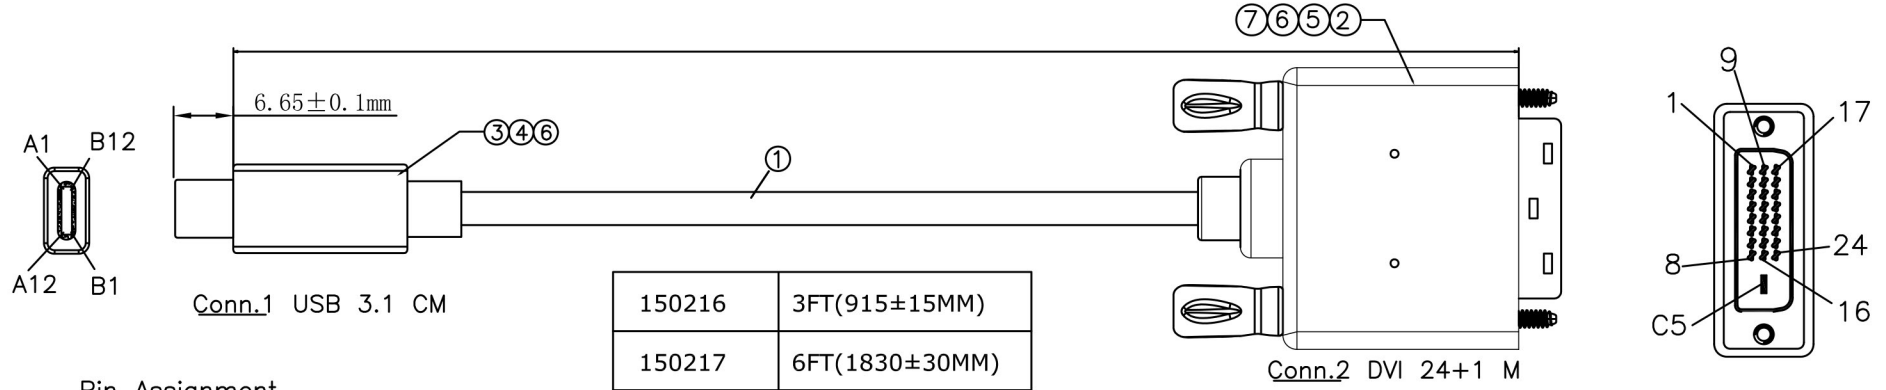


150216	3FT(915±15MM)
150217	6FT(1830±30MM)

Pin Assignment

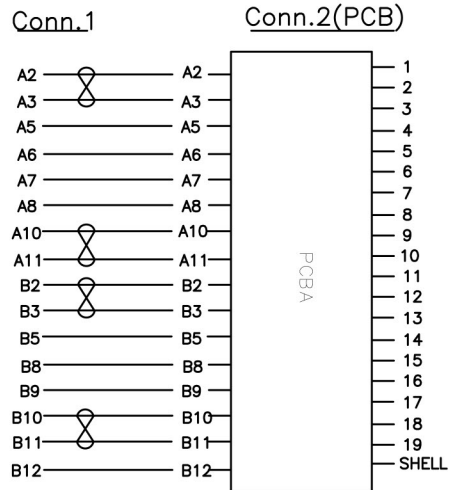

Marking: E468041 AWM STYLE 2725 80° C 30V VW-1 SUPER HIGH SPEED USB Revision 3.1

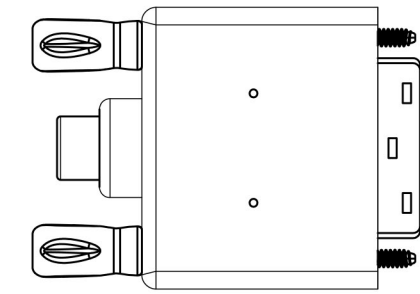

Electrical performance test: TYPE C to DVI machine testing

1. The video has no signal jitter, smearing, ghosting, missing color and other abnormal displaying.

2. TV or monitor:4K\*2K/30HZ

NO	DESCRIPTION	Q'TY	UNIT
7	screw	2	PCS
6	45P PVC WHITE	16	G
5	PE	6	G
4	Plasitc Hood for TYPE C, Material: ABS , Color: WHITE	1	PCS
3	USB3.1 (C) M Solder Type Shell GOLD, ecru Insulation	1	PCS
2	TYPE C TO DVI 24+1 M PCBA(IC:8711) Shell GOLD,Black Insulation	1	PCS
1	USB3.1 (32#(7/0.08T)*1P+D(7/0.08T)+AL+MY)*4P+32#(7/0.08T)*1P+32#(7/0.08T)*4C+22#(65/0.08T)*2C+F+AB(16/9/0.8TC) OD:4.5MM PVC WHITE	1	PCS

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

My Cable Mart, LLC  
Authorized Distributor

DRAWN BY	DATE: 2017.6.1	DESCRIPTION: USB 3.1 Type C Male TO DVI 24+1 M	
CHECKED BY	SHEET 1 of 2	ITEM NO. 150XXX	
APPROVED BY	SCALE 1:1	REV. 00	UNIT:mm