


PIN OUT:

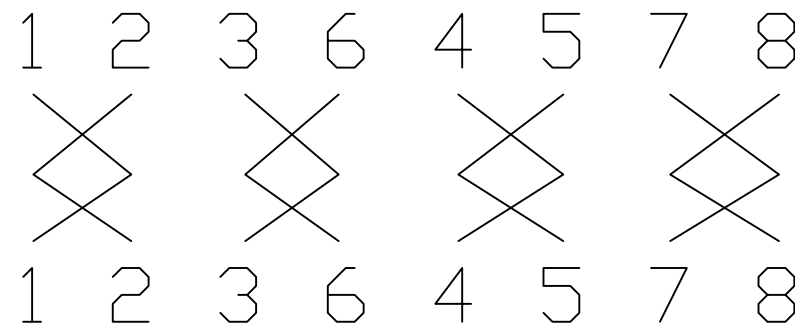


NOTES:

1. 100% OPEN & SHORT TESTING
2. VOLTAGE: 300V DC
3. INSULATION RESISTANCE: 20M ohm
4. CONTACT RESISTANCE: 5ohm

| CUSTOMER P/N | length |
|-----------------|--------------------|
| FE-C6270-01-BLK | 1FT(305MM±30MM) |
| FE-C6270-02-BLK | 2FT(610MM±30MM) |
| FE-C6270-03-BLK | 3FT(915MM±30MM) |
| FE-C6270-05-BLK | 5FT(1520MM±30MM) |
| FE-C6270-07-BLK | 7FT(2130MM±50MM) |
| FE-C6270-10-BLK | 10FT(3050MM±50MM) |
| FE-C6270-14-BLK | 14FT(4270MM±80MM) |
| FE-C6270-20-BLK | 20FT(6150MM±100MM) |
| FE-C6270-25-BLK | 25FT(7620MM±100MM) |

| | | |
|-----|----------|--|
| 8 | | |
| 7 | | |
| 6 | | |
| 5 | | |
| 4 | | PE BAG+LABEL |
| 3 | | PCV45Pa BLACK |
| 2 | | CAT6 UTP RJ45 MALE |
| 1 | | CAT.6 UTP CABLE 24AWG(7/0.18BC)*4P+CROSS,,+,, OD: 6.0MM BLACK |
| NO. | Material | Description |

MY CABLE MART LLC

| | | | |
|------------------|--|---|---------------|
| Title: | CAT6 ANGLED-DOWN NETWORK PATCH CORD |  | |
| Customer: | | Page: 1/1 | Drawn BY: CLR |
| Customer P/N: | | REV: A1 | Check BY: DYH |
| Date: 2023.12.15 | Drawing NO.: FLF270 | Unit: mm | Appd BY: |