


High Speed HDMI™ Cable with Ethernet E358026 AWM STYLE 20276 80°C 30V VW-1

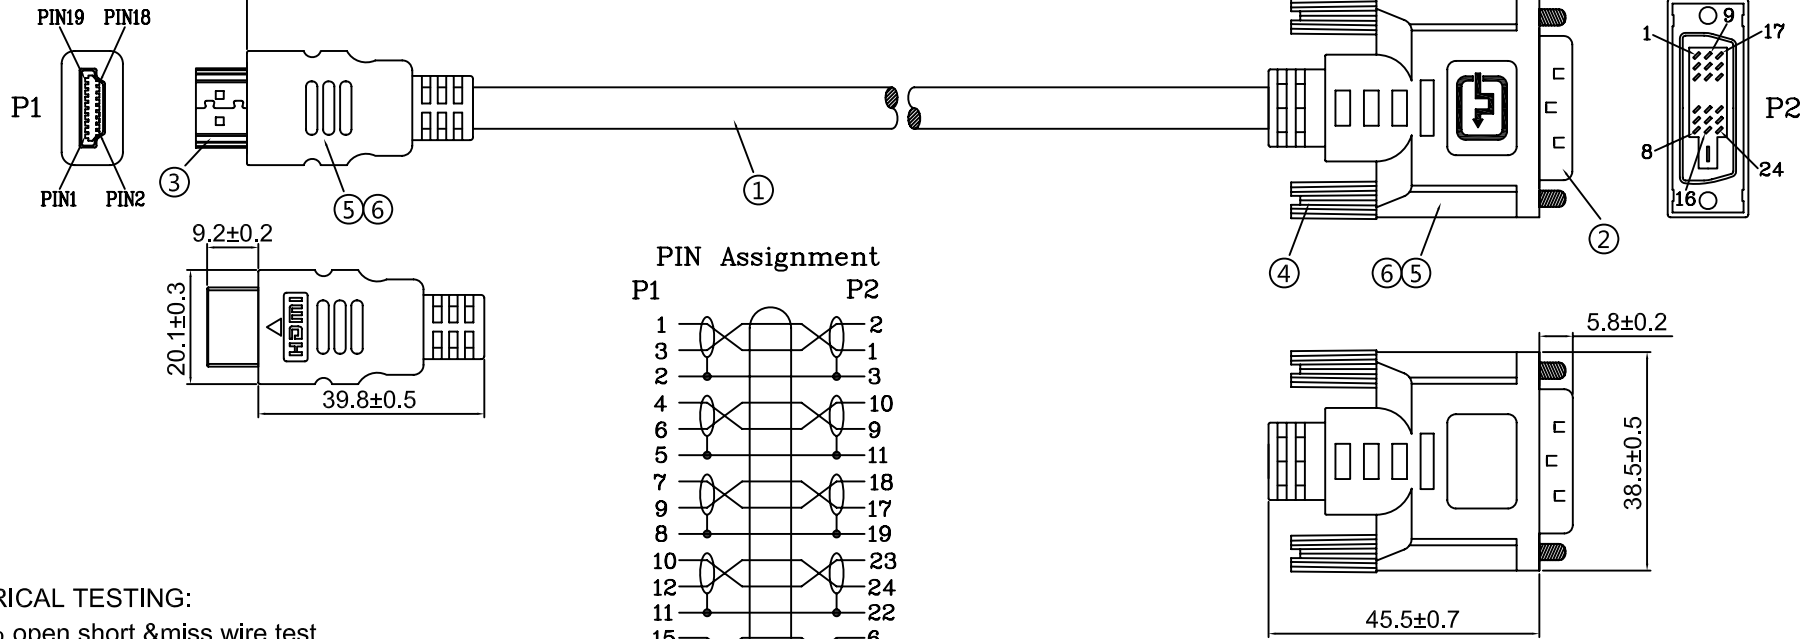

PIN Assignment

P1	P2
1	2
3	1
2	3
4	10
6	9
5	11
7	18
9	17
8	19
10	23
12	24
11	22
15	6
16	7
17	15
18	14
19	16
Shell	Braid
	Shell

Client NO	GC-HD-35-6	GC-HD-50-6
Length	10670±100mm(35FT)	15240±150mm(50FT)

ELECTRICAL TESTING:
 (1)100% open short &miss wire test.
 (2)Insulation Resistance: ≥5M Ω .
 (3)Contact Resistance:5 Ω .
 (4)Dielectric Strength:DC 300V/0.1s.
 (5)HDTV-DVD(1080P):100%.Testing Line Process.

NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes
⑥	OUTER MOLDED	45P Black PVC	g	12	
⑤	INNER MOLDED	PE	g	8	
④	SCREW	DVI Screw,Nickel Plater, L43.2*USA4-40/Φ2.8	PCS	2	
③	CON	HDMI AM Gold Plated Connector	PCS	1	
②	CON	DVI 18+1 Gold Plated Connector	PCS	1	
①	CABLE	[(26AWG+FPE)*1P+D+AL-foil]*5P+(28AWG+HDPE)*4C+AEB+Black PVC OD8.0mm	PC	1	

	MY CABLE MART LLC				
X.±0.20					
.X±0.15					
.XX±0.10	Drawing No.	JXD-DV1002/G/BK/26AWG			
REV	A/O	Title	HDMI AM-DVI 18+1 M	Draw	Song
Scale	/	Customer	1-39	Checked	
Page	1/1	Item No.	-	Sales	
Unit	mm	Date	2021/06/07	Approval	