



High Speed HDMI™ Cable with Ethernet E358026 AWM STYLE 20276 80°C 30V VW-1

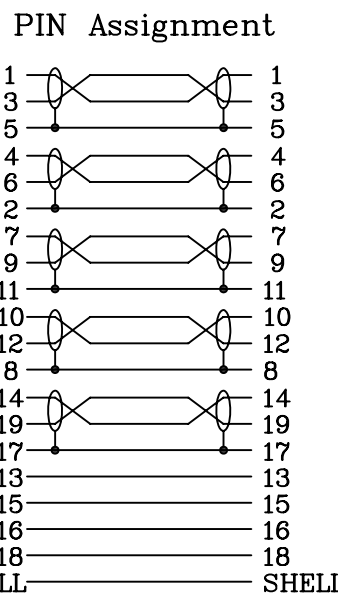

- Test Condition:
  - 100% OPEN & SHORT TEST;
  - Insulation Resistance: DC300V 5MΩ(Min) ;
  - Conductor Resistance: 5Ω/Max.
  - Hi-Pot:DC 300V/0.1s.
- The product is ROHS compliant.
- HDTV-DVD TEST:4K@60Hz

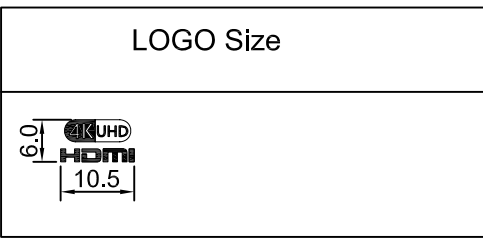

Client NO	GC-HHL18-15
Length	4580±50mm(15FT)

⑥	MESH	Nylon Mesh	PCS	1	
⑤	INNER MOLDED	PE	g	15	
④	SHELL	HDMI AM zinc alloy Shell,Metal Gun Colour.	PCS	2	
③	CON	HDMI AM Gold Plated Connector	PCS	1	
②	CON	HDMI AM Gold Plated Connector	PCS	1	
①	CABLE	[(28AWG+FPE)*2C+D+HDPE+AL-foil]*5P+ (28AWG+HDPE)*4C+AL+AEB+Black PVC OD7.3mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

		<b>MY CABLE MART LLC</b>			
X.±0.20 .X±0.15 .XX±0.10					
REV	A/0	Title	HDMI AM-AM	Draw	Song
Scale	/	Customer	1-39	Checked	
Page	1/1	Item No.	-	Sales	
Unit	mm	Date	2024/05/15	Approval	