



High Speed HDMI™ Cable with Ethernet E358026 AWM STYLE 20276 80°C 30V VW-1

PIN Assignment

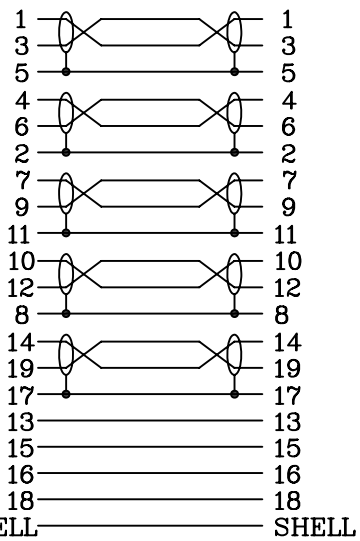

LOGO Size

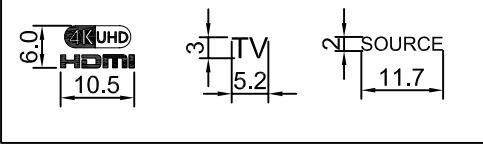

- Test Condition:
 - 100% OPEN & SHORT TEST;
 - Insulation Resistance: DC300V 5MΩ(Min) ;
 - Conductor Resistance: 5Ω/Max.
 - Hi-Pot:DC 300V/0.1s.
- The product is ROHS compliant.
- HDTV-DVD TEST:4K@60Hz

⑥	MESH	Nylon Mesh	PCS	1	
⑤	INNER MOLDED	PE	g	15	
④	SHELL	HDMI AM zinc alloy Shell, Metal Gun Colour.	PCS	2	
③	CON	HDMI AM Gold Plated Connector	PCS	1	
②	CON	HDMI AM Gold Plated Connector, with IC-HT8181	PCS	1	
①	CABLE	[(26AWG+FPE)*2C+D+HDPE+AL-foil]*5P+ (28AWG+HDPE)*4C+AL+AEB+Black PVC OD8.0mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

Client NO	GC-HHL18-30
Length	9150±100mm(30FT)

	MY CABLE MART LLC						
	X.±0.20		Drawing No. JXD-HD1112/G/BK/26AWG+IC/WA				
	.X±0.15		REV	A/0	Title	HDMI AM-AM	Draw
.XX±0.10		Scale	/	Customer	1-39	Checked	
		Page	1/1	Item No.	-	Sales	
Unit	mm	Date	2021/10/27	Approval			